



ILT400

Profiling Belt Radiometer

Advanced technology delivers the highest performance and lowest cost belt radiometer on the market.

The ILT400 profiling belt radiometer combines the all-in-one exposure, intensity and profile capability introduced in the IL393 with new solid-state detector and ultra-stable technology to give lower noise, greater speed and higher accuracy at a price below any precision belt radiometer sold today. Add rechargability and the entire filter suite of the IL390/393 line and the result is clear:

Nothing comes close to the ILT400


SPECIFICATIONS

- Dose Range:** 5 mJ – 20 J/cm²
- Temperature Range:** 10° – 50° C (case temperature)
- Irradiance Range:** 10 mW/cm² – 20 W/cm²
- Accuracy:** Typically better than 6%
- Cosine Receptor:** Integrating sphere
- Display:** 4 significant digits
- Display Graphics:** Resolves 5% of full scale (peak irradiance)
- Size:** 12.7 x 111 x 161 mm (0.5" x 4.4" x 6.3")

FEATURES & BENEFITS

- ◇ Visible-blind solid state detector
- ◇ Ultra-stable amplifier
- ◇ Rechargeable (charger included)
- ◇ Integrated exposure
- ◇ Peak Irradiance
- ◇ Intensity profiling with auto-scale
- ◇ Baseline profile memory
- ◇ Current - Baseline % Difference

SPECTRAL CURVES

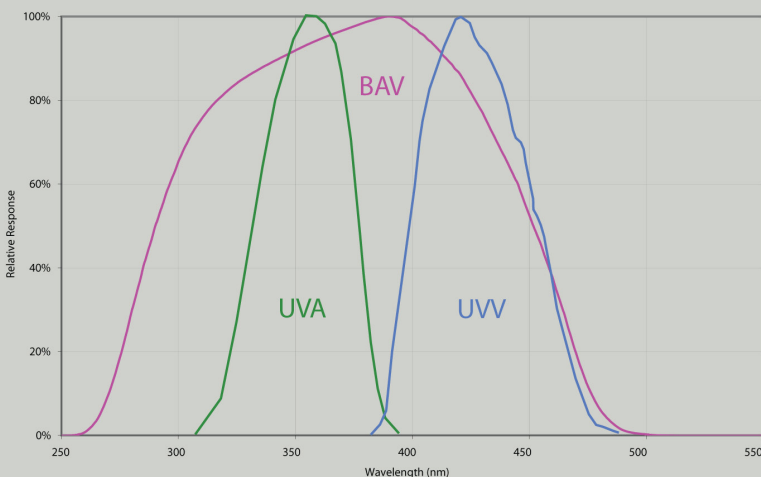

UUV Range Radiometer Discontinued



InternationalLight
TECHNOLOGIES

NIST-Traceable Light Measurement Systems

10 Technology Drive
Peabody, MA 01960

Phone: (978) 818-6180 Fax: (978) 818-6181
Web: www.intl-lighttech.com